

LINDAT/CLARIN



Jozef Mišutka



Institute of Formal and Applied Linguistics
Faculty of Mathematics and Physics
Charles University in Prague
Czech Republic


- two implementations
 - EPIC
 - own handle server
- implementation specified in repository configuration

- using EPIC API v1
 - easy to implement
- issues with resolution times
- flexibility
- shared prefix

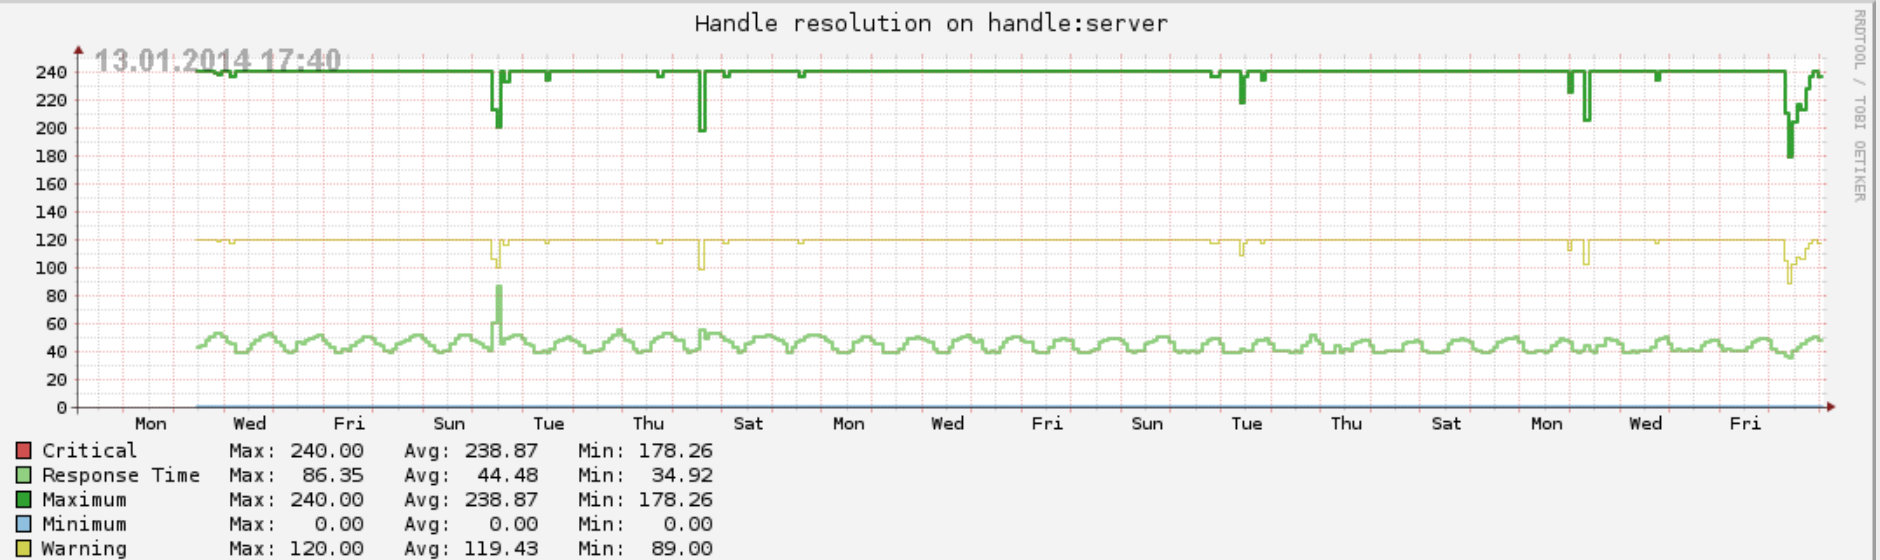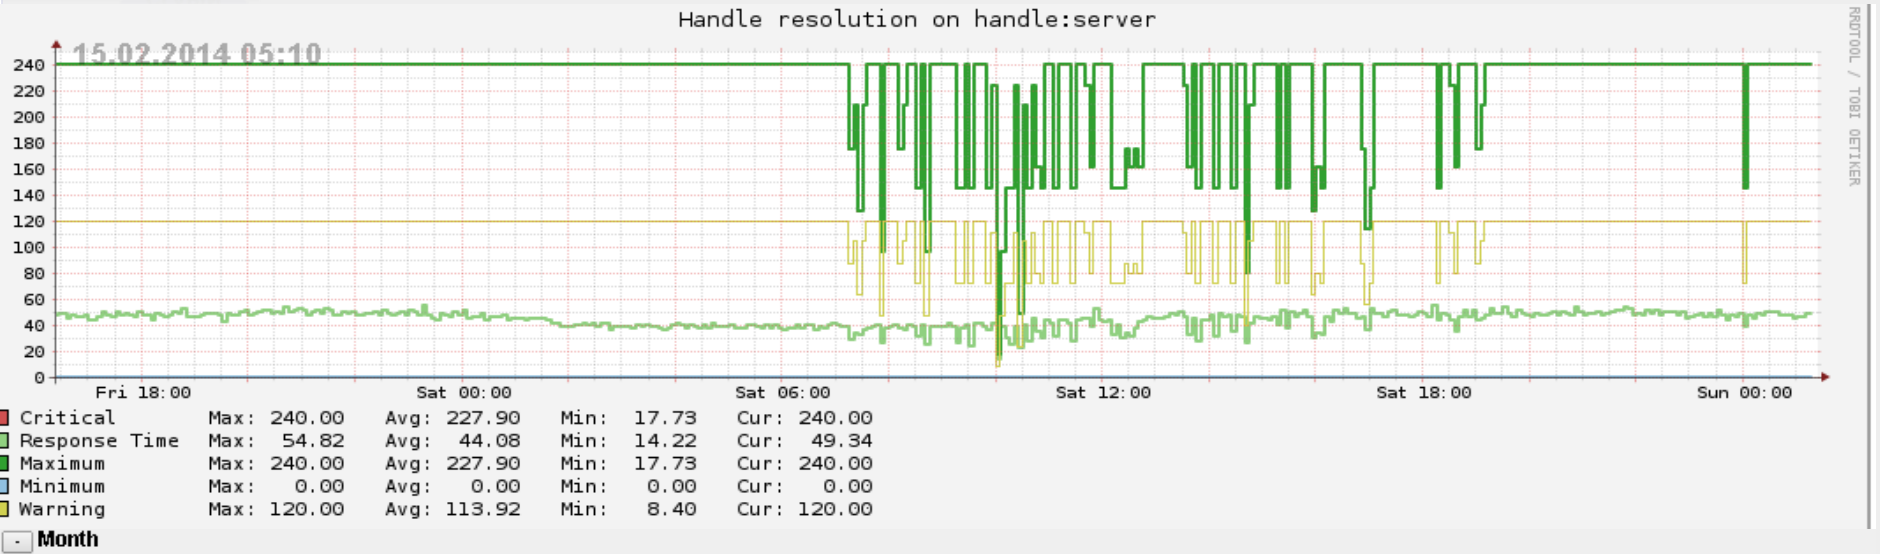

- EPIC improvements after discussion

Handle resolution on handle:server

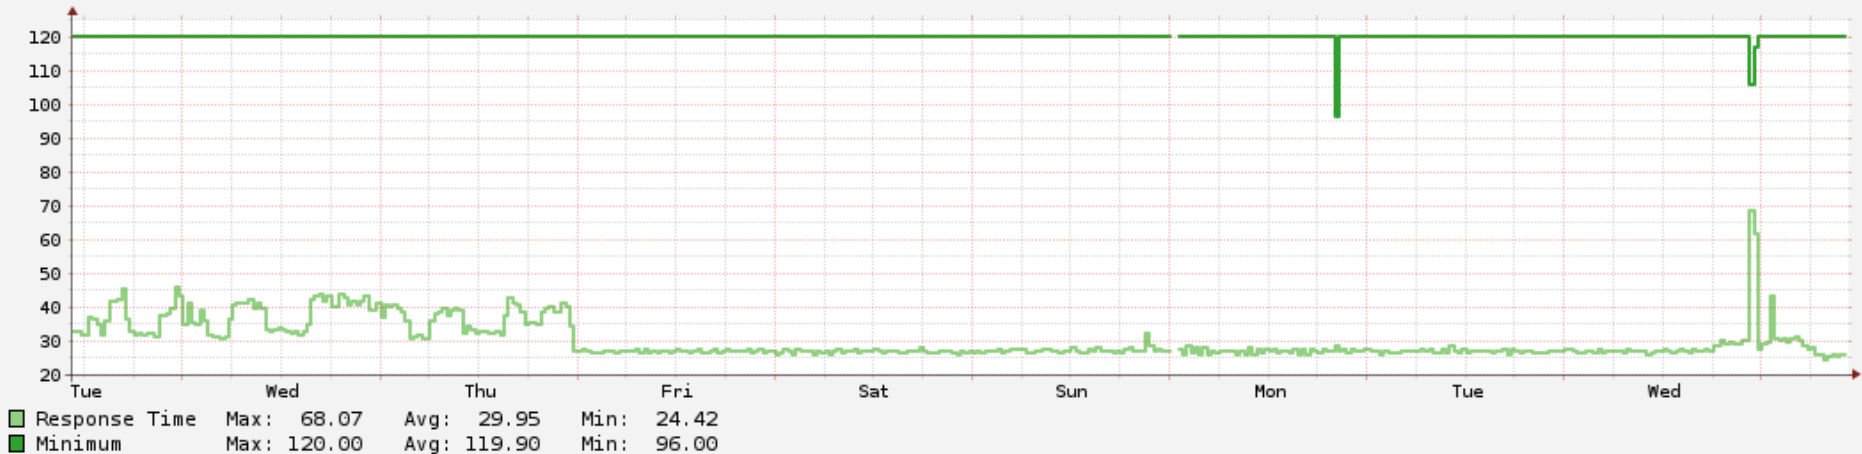

- own handle server
 - bought prefix (11234) for 50\$ + 50\$ from <http://www.handle.net/>
 - handle server 6.2 implemented in java through maven (shipped with DSpace)
 - started using external command (nohup java ...)
 - does **almost** nothing
 - "storage_type" = "CUSTOM"
 - "storage_class" = "org.dspace.handle.HandlePlugin"

setHaveNA

createHandle

deleteHandle

updateValue

deleteAllRecords

checkpointDatabase

shutdown

scanHandles

scanNAs

getRawHandleValues

haveNA

getHandlesForNA

- handle database in DSpace

handle_id	handle	resource_type_id	resource_id
1	11858/00-097C-0000-0001-486F-D	4	1
2	11858/00-097C-0000-0001-4870-7	3	1
4	11858/00-097C-0000-0001-4872-3	2	3